


Wymiary montażowe silników kołnierзовych

Mounting dimensions for flange-mounted motors

Typ Type	D	E	F	GA	M	N	P	S	T
	[mm]								
mSSBh 90S...	24j6	50	8h9	27,0	165	130j6	200	12	3,5
mSSBh 90L...	24j6	50	8h9	27,0	165	130j6	200	12	3,5
mSSBg 100L...	28j6	60	8h9	31,0	215	180j6	250	15	4,0
mSSBg 112M...	28j6	60	8h9	31,0	215	180j6	250	15	4,0
mSSBg 132S...	38k6	80	10h9	41,0	265	230j6	300	15	4,0
mSSBg 132M...	38k6	80	10h9	41,0	265	230j6	300	15	4,0
2mSSBg 160M...	42k6	110	12h9	45,0	300	250j6	350	19	5,0
2mSSBg 160L...	42k6	110	12h9	45,0	300	250j6	350	19	5,0
2mSSBg 180M...	48k6	110	14h9	51,5	300	250j6	350	19	5,0
2mSSBg 180L...	48k6	110	14h9	51,5	300	250j6	350	19	5,0

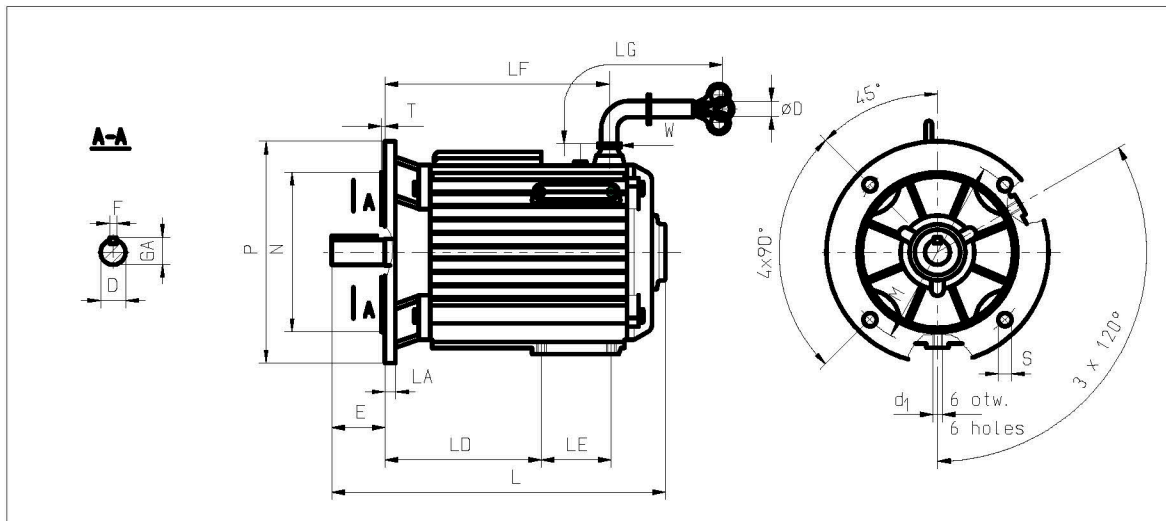

Wymiary gabarytowe silników kołnierзовych

Overall dimensions for flange-mounted motors

Typ Type	d ₁	H	L	LA	LD	LE	LF	LG	ØD	W	Łożysko nr Bearing No
	[mm]										
mSSBh 90S ...	-	-	266	8	-	-	65	810	5,5	W20-II-12	6205 2Z
mSSBh 90L ...	-	-	291	8	-	-	65	810	5,5	W20-II-12	6205 2Z
mSSBg 100L ...	-	-	332	11	-	-	70	810	5,5	W20-II-12	6206 2Z
mSSBg 112M ...	-	-	362	12	-	-	85	810	6,5	W27-II-18	6306 2Z
mSSBg 132S...	-	-	397	12	-	-	245	810	6,5	W27-II-18	6308 2Z
mSSBg 132S-2B	-	-	435	12	-	-	283	810	6,5	W27-II-18	6308 2Z
mSSBg 132M ...	-	-	435	12	-	-	283	810	6,5	W27-II-18	6308 2Z
2mSSBg 160M-4	M12	164	520	13	181	100	327	810	6,5	W33-II-24	6309 2Z
2mSSBg 160M-6	M12	164	520	13	181	100	327	1100	6,5	W33-II-24	6309 2Z
2mSSBg 160L ...	M12	164	564	13	213	100	370	1100	6,5	W33-II-24	6309 2Z
2mSSBg 180M ...	-	-	572	13	-	-	342	1100	6,5	W33-II-24	6311 2Z
2mSSBg 180L ...	-	-	627	13	-	-	342	1100	6,5	W33-II-24	6311 2Z

Formy wykonania:

- IM 3021 - wg PN-EN 60034-7
- IM B5/IM V1 - wg PN-EN 60034-7

Mounting forms:

- IM 3021 – per EN 60034-7
- IM B5/IM V1 - per -EN 60034-7